


PR 1400 DICUT[®]

WEIGHT FROM 1625g

32 OXiC

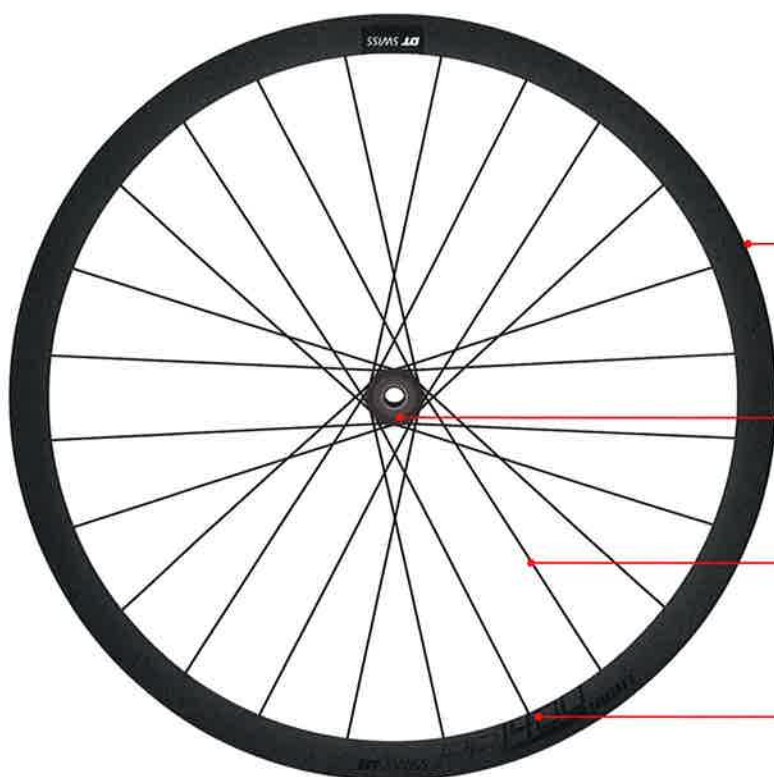

STEALTH PERFORMER

FUNCTIONAL APPEARANCE

TOUGH LIGHTWEIGHT


RIM BRAKE PERFECTION

The OXiC technology wheel range is growing. Next to the extremely popular 21 mm low profile OXiC rim the new PR 1400 DICUT[®] 32 OXiC will be the pinnacle of aluminum road wheels. The ceramic OXiC surface coating brings brake performance to rim brakes like it has never been seen before.

The rims are wide, medium profile and super strong, ensuring outstanding durability and reliability. If set up tubeless, supreme comfort and grip are added to the athletic character of this wheel set.

PR 1400 DICUT® 32 OXiC

TECHNICAL DETAILS

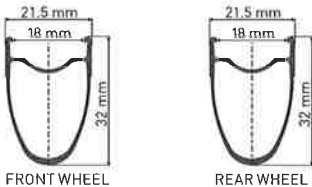

CLINCHER

| | |
|--------------------|--|
| FRONT WHEEL | 5/100 mm QR |
| REAR WHEEL | 5/130 mm QR Shimano 11 speed |
| HUB | DICUT®, 240s based hub with 36T SL Ratchet System, ASLS freehub body |
| BRAKE INTERFACE | Rim Brake |
| RIM | SBWT® welded aluminum OXiC rim, rear asymmetric, tubeless ready |
| RIM DIMENSION | 622 x 18 mm |
| SPOKES | T-head spokes, DT aero comp®, sandblast black |
| NIPPLES | DT Pro Lock®, Squorx Pro Head®, aluminum, grey, with PHR washer |
| LACING FRONT | 20 x radial |
| LACING REAR | 24 x 2-cross |
| WEIGHT | 743 g Front, 882 g Rear |
| WHEEL MOUNTING | RWS titan, aluminum lever |
| INCLUDING | Tubeless ready tape (21 mm), tubeless valve (55 mm) and refill kit, SwissStop BXP brake pads |
| CROSS SELLING RWS | No |
| SPOKE PROTECTION | WXZXXPSL15648S |
| MAX. SYSTEM WEIGHT | 130 kg |
| ASTM | Class 2 |
| CUSTOMIZE OPTION | Freehub body option |
| FRONT WHEEL | No built in option |
| REAR WHEEL | Sram XDR, Campagnolo |